

HEATING

TECHNICAL DATA SHEET

FRONTBOX







FRONTBOX

Thanks to the modular concept, the frontbox serves tailor made solutions, which suites all your demands. Heavac quality, tailor made designed for buses and coaches.

- Standardized components
- Heavy duty components
- Highest performance units
- Brushless motor standard
- Full aluminum
- Lightweight
- Recyclable

Electrical connection ventilator:
Connector: AMP JPT 8 positions

- | | |
|---------------|-----------------|
| 1) +24VDC | 5) TEMP. INT. |
| 2) - GND | 6) BLOWER SENSE |
| 3) PWM | 7) TEMP. SENSOR |
| 4) TEMP. INT. | 8) TEMP. SENSOR |

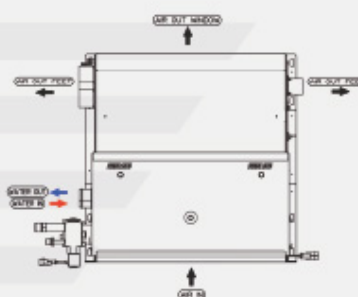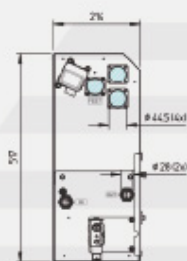

TECHNICAL DATA RIEL	
COOLING CAPACITY	8,0 kW
HEATING CAPACITY	16 kW
AIR FLOW	900m ³ /h
WEIGHT	12kg
TOTAL POWER INPUT	11A
BLOWER RPM CONTROL	STEPLESS
BRUSHLESS BLOWERS	25.000 HOURS
HOUSING	ALUMINUM AlMg3
HEAT EXCHANGER	Al/Al
EVAPORATOR	Al/Al
REFRIGERANT	R 134a

HEAVAC B.V.
Spegelt 30
5674 CD Nuenen
The Netherlands



Tel : +31(0)40-2636170
Fax: +31(0)40-2636179
info@heavac.nl
www.heavac.nl